



## Brockway Fire Protection Water Infrastructure

<b>Project Number</b>	02.01.03.0013		
<b>Action Priority</b>	Upgrade Priority Water Infrastructure to Fight Catastrophic Wildfire		
<b>Implementers</b>	North Tahoe Public Utility District		
<b>Supporting Agencies</b>			
<b>Primary Contact</b>	Suzi Gibbons (sgibbons@ntpud.org)		
<b>Stage</b>	Planning/Design	<b>Duration</b>	2022 - 2024
<b>Total Project Cost</b>	\$5,281,000	<b>Funding Request</b>	\$5,281,000

### Community Wildfire Protection Program ➤ Upgrade Priority Water Infrastructure to Fight Catastrophic Wildfire

The water system is comprised of watermain ranging from 2 inches to 8 inches in diameter. The system is deficient in fire flows and in the number and spacing of fire hydrants and does not meet current fire codes. The project would install 7,000 linear feet of new 8- and 10-inch diameter watermain to replace the existing less than 6-inch diameter watermain. Fifteen new fire hydrants would be installed that would be accessible from the public right of way. The new upsized watermain would also improve flow capacity of the existing intertie with Incline Village GID which is limited to 200 gpm. Flow and pressure to customers would be improved for those served by the 2-inch backyard mains.

*No Key Photo provided for this Project*


#### Targeted Performance Measures

*No Expected Accomplishments provided*

#### Threshold Categories

- Vegetation Preservation

#### Location

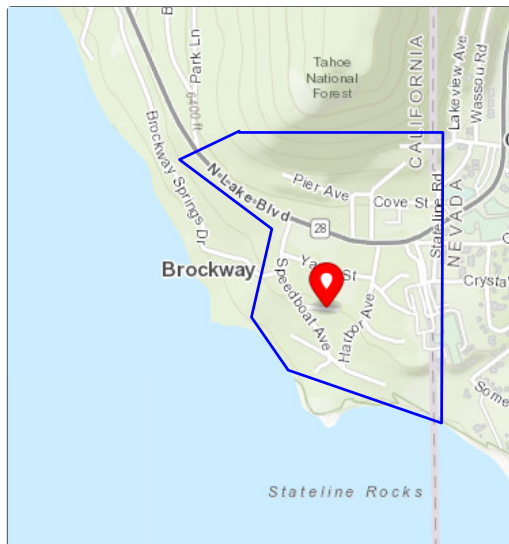

#### Targeted Funding

- Targeted Funding: Lake Tahoe Restoratio... (USFS - LTBMU), \$2,000,000
- Targeted Funding: North Tahoe Public Utility D... (NTPUD), \$3,281,000

## Photos

*No additional photos provided*

---

Project Fact Sheet Data as of 06/06/2025